

RECEIVED

PATENT

283.6  
03.15.02

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

TC 2800 MAIL ROOM

In re Application of

Michael John MAYTUM, et al

Serial No.: 10/024,402

Filed: December 18, 2001

For: OVERVOLTAGE PROTECTION  
CIRCUIT

)  
) Examiner: Unknown


)  
) Irvine, California  
) February 11, 2002

**CERTIFICATE OF MAILING**

I hereby certify that this correspondence  
is being deposited with the U.S. Postal  
Service as first class mail in an envelope  
addressed to Commissioner of Patents,  
Washington D.C. 20231 on February 12, 2002.

**SUBMISSION OF PRIORITY DOCUMENT**

Commissioner for Patents  
Washington D.C. 20231

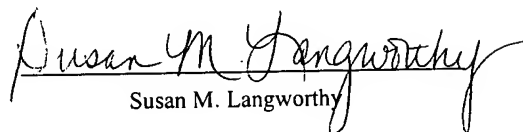
  
Susan M. Langworthy

Dear Sir:

Enclosed please find U.K. Patent Application No. 0030992.2, filed December 20,  
2000, to support the claim for foreign priority under 35 U.S.C. §119(a)-(d) or (f).

Respectfully submitted,

Date: Feb. 12, 2002

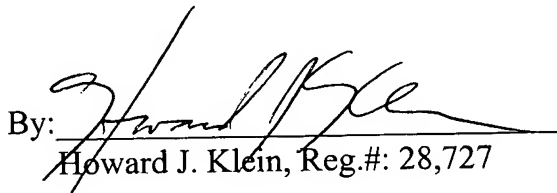By:   
Howard J. Klein, Reg.#: 28,727

KLEIN & SZEKERES, LLP  
4199 Campus Drive, Suite 700  
Irvine, California 92612  
Telephone: (949) 854-5502



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport TO  
South Wales  
NP10 8QQ

RECEIVED  
MAR - 5 2002  
2800 MAIL ROOM

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

Signed


Dated

24 JAN 2002

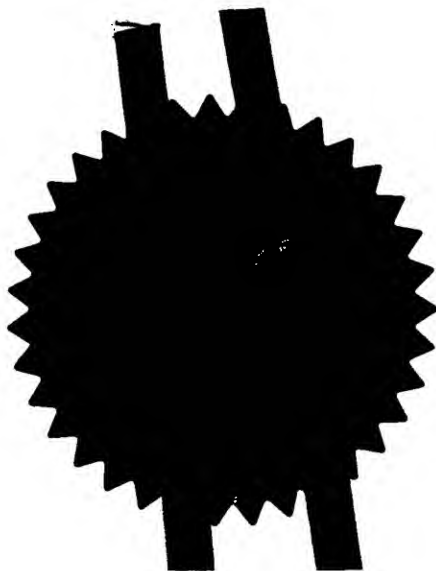



20DEC00 E59 27-4 00291  
E01/7700 0.11-0030992.2



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

AVH/AJW/P1393UK

2. Patent application number

(The Patent Office will fill in this part)

20 DEC 2000

0030992.2

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Power Innovations Limited  
Manton Lane  
Bedford  
MK41 7BJ

Patents ADP number (*if you know it*)

07380694001

If the applicant is a corporate body, give the country/state of its incorporation

UK

4. Title of the invention

Overvoltage Protection Circuit

5. Name of your agent (*if you have one*)

Lewis & Taylor

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

144 New Walk  
Leicester  
LE1 7JA

Patents ADP number (*if you know it*)

711002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

yes

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s) 2

Abstract

Drawing(s) 8

+84

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Lewis Taylor

Date

Lewis & Taylor

19.12.00

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr A V Hallam

0116 233 8181

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## OVERVOLTAGE PROTECTION CIRCUIT

### BACKGROUND OF THE INVENTION

The present invention relates to the field of overvoltage protection devices and circuits. More specifically, it relates the field of overvoltage protection circuits of the type embodied as integrated circuit, and that are particularly well-suited for use in electrical equipment associated with telephone lines.

In a telephone access network, the electronic circuitry which feeds the telephone line to the subscriber conventionally provides a function known as BORSCHT, which stands for Battery feed, Overvoltage protection, Ringing, Signalling, Coding, Hybrid and Testing. Conventionally, a single integrated circuit (IC) known as a subscriber line interface circuit (SLIC) is provided to carry out the B,S,C and H functions of BORSCHT, requiring additional circuitry to be provided to perform the functions of overvoltage protection, ringing and testing. In fact, SLICs are increasingly being manufactured to incorporate the ringing and testing functions. Thus, only overvoltage protection needs to be incorporated externally.

### SUMMARY OF THE INVENTION

The present invention aims to provide an improved overvoltage protection circuit that is particularly advantageous for use in electrical equipment associated with telephone lines. In accordance with a first preferred embodiment, the present invention provides an overvoltage protection circuit for a conductor, the circuit comprising:

- a switching element connecting the conductor to a reference potential;
- and a trigger operable to switch the switching element between a first, OFF state and a second, ON state;

wherein the trigger is voltage-triggered by voltages of a first magnitude on the conductor and current-triggered by voltages of a second magnitude on the conductor, thereby to provide overvoltage protection at two discrete voltage magnitudes.

In accordance with a second preferred embodiment, the present invention provides an overvoltage protection circuit for a conductor, the circuit comprising:

- first and second switching elements, each having a first electrode, a second

electrode and a base electrode;

a diode; and

a resistance;

wherein: the first electrode of the first switching element is connected to the conductor and to a first electrode of the resistance;

the second electrode of the first switching element is connected to the base electrode of the second switching element and a first electrode of the diode;

the base electrode of the first switching element is connected to a second electrode of the diode, a second electrode of the resistance and to the second electrode of the second switching element;

the first electrode of the second switching element is connected to a reference potential;

the base electrode of the first switching element is connected to the conductor;

and the circuit is voltage-triggered by voltages of a first magnitude on the conductor and current-triggered by voltages of a second magnitude on the conductor, thereby to provide overvoltage protection at two discrete magnitudes.

Conveniently, the first and second switching elements together are formed by a silicon controlled rectifier (SCR), with its gate electrode being connected to the conductor.

Advantageously, all of components of the circuit are provided on a single integrated circuit.

According to another aspect of the present invention, there is provided a method of protecting a conductor from overvoltages at two different magnitudes, the method comprising:

providing a switching element between the conductor and a reference potential, said switching element being switchable between a first, conducting state and a second, non-conducting state;

monitoring the voltage on the conductor and switching the switching element into the conducting state in response to the voltage exceeding a first threshold voltage, thereby to connect the conductor to the reference potential to reduce the voltage to below the first threshold voltage;

monitoring the current flowing through the conductor and switching the switching

element into the conducting state in response to the current exceeding a current value representing a second threshold voltage lower than the first threshold voltage, thereby to connect the conductor to the reference potential to reduce the voltage on the conductor to below the second threshold voltage.

### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1a is a schematic block diagram of a known overvoltage protection circuit;

Figure 1b is a diagram of the electrical characteristics of the protection circuit of Figure 1a;

Figure 2a is a schematic circuit diagram of a first preferred embodiment of an overvoltage protection circuit according to the invention;

Figure 2b is a diagram of the electrical characteristics of the protection circuit of Figure 2a;

Figure 3 shows a preferred silicon structure for the protection circuit of Figure 2a;

Figure 4a is a schematic circuit diagram of a second preferred embodiment of a protection circuit according to the invention;

Figure 4b is a diagram of the electrical characteristics of the protection circuit of Figure 4a;

Figure 5 shows a possible silicon structure for the protection circuit of Figure 4a;

Figure 6 is a schematic circuit diagram of a third embodiment of a protection circuit according to the invention;

Figure 7a is a schematic circuit diagram of a fourth embodiment of a protection circuit according to the invention;

Figure 7b is diagram of the electrical characteristics of the protection circuit of Figure 7;

Figure 8 is a possible silicon structure for the protection circuit of Figure 7a;

Figure 9a is a schematic circuit diagram of a fifth embodiment of a protection circuit according to the invention;

Figure 9b is diagram of the electrical characteristics of the protection circuit of Figure 9a; and

Figure 10 is a possible silicon structure for the protection circuit of Figure 9a.

### DETAILED DESCRIPTION OF THE INVENTION

Figure 1a shows, generally at 10, a conventional SLIC 22 and an associated overvoltage protection circuit 19, of known design, for preventing voltage and current overload on telephone line conductors 11, 13 to prevent damage to the SLIC 22. Figure 1b shows the electrical characteristics of the protection circuit 19. Since the ringing function requires a higher supply voltage than the negative battery feed to the SLIC, an additional negative voltage supply is provided on the SLIC. Thus, the SLIC has two negative voltage supplies 12, 14 respectively at -70 volts for normal use and at -150 volts for the ringing function. In order to minimise power consumption and dissipation, the two negative voltage supplies are internally switched by a switch 17 on to line driver amplifiers 16, 18, to boost their voltage swing when ringing is required.

Since the voltage supply to the SLIC 22 can be switched between -70 volts and -150 volts, in order to provide adequate protection for the conductor lines 11, 13, the protection circuit 19 must start to limit voltage on the line when the voltage falls below -150 volts. However, this protection is inadequate when the line driver amplifiers are switched to the -70 volts supply, since the line voltage will be allowed to drop to -150 volts before the overvoltage is limited. The voltage-current characteristic of the circuit 19 shown in Figure 1b illustrates that almost 100 volts of overvoltage will be applied to the line driver amplifiers in this situation. With this level of overvoltage, high and possibly destructive currents can be sourced by the line driver amplifiers 16, 18.

Conventionally, a series resistor 20 is connected directly to each SLIC line driver output in order to limit current flow at these high overvoltages. However, this resistor must be capable of a high power dissipation and consequently, in normal use, generates a substantial drop in line feeding voltage.

Figure 2a illustrates a first preferred embodiment of an overvoltage protection circuit 40 according to the present invention which is used to provide protection for the SLIC 22. A separate protection circuit 40 is provided for each line conductor 11, 13. The protection circuits are identical and therefore only one is shown in Figure 2a for clarity. In this embodiment, the SLIC may be a conventional SLIC as shown in Figure 1a, for



example that manufactured under the trade name Infineon PEB 4266. The two supply voltages, 12, 14 can be alternately switched between the line driver amplifiers 16, 18 by means of a switch 17.

The overvoltage protection circuit 40 is connected between the conductor line 11 and a protective bonding and grounding line (PG) 42. In this embodiment, the PG 42 is represented by ground zero voltage. Since the supply voltage to the SLIC 22 and conductor line 11 is negative, PG 42 actually acts as a current source providing current to the conductor line 11 in order to increase its voltage when an overvoltage occurs.

The protection circuit 40 comprises a silicon control rectifier (SCR) 47 connected between PG 42 at its anode 44 and to the conductor line 11 at its cathode 46. The SCR 47 is conventional in form and can be represented by the combination of two bipolar transistors TR1, TR2 having two common electrodes. Thus, the anode 44 of the protection circuit 44 is formed by the emitter electrode of the second transistor TR2, and the cathode 46 of the protection circuit 40 is formed by the emitter of the first transistor TR1. The base electrode of each transistor TR1, TR2 is connected to the collector of the other transistor.

In order to provide adequate protection to the conductor line 11, the protection circuit 40 includes a number of other circuit components. Firstly, the base electrode of the first transistor TR1 (which is also the collector electrode of the second transistor TR2) is connected to the conductor line 11 by means of a first resistor R1. Secondly, the base electrode of the first transistor TR1 is also connected to the base electrode of the second transistor TR2 (which is also the collector electrode of the first transistor TR1) by means of an avalanche or zener diode D1. The diode D1 is poled in the same direction as the collector-base diodes of the transistors TR1 and TR2 and exhibits avalanche breakdown when the reverse bias voltage exceeds a predetermined level. In addition, the base electrode of the first transistor TR1 is connected directly to the conductor line 11 by a short circuit 48 parallel with the resistor R1.

The embodiment of Figure 2a also includes two further circuit elements. The first of these elements is a conventional semi-conductor diode D2 which is connected in antiparallel with the SCR 47, i.e., diode D2 anode to SCR 47 cathode and diode D2 cathode to SCR 47 anode. A second (optional) element is a second resistance R2 that is connected serially in the conductor line 11.

Figure 2b is a diagram of the electrical characteristics of the protection circuit 40 of Figure 2a. The operation of the circuit of Figure 2a is described below.

### **Voltage triggering**

In the ringing mode, the switch 17 operates to connect the -150 volt supply to the line driver 18. The protection circuit 40 is therefore operable to protect the conductor line 11 from any overvoltages which may take the voltage on the conductor line 11 below -150 volts. When the voltage on the conductor line is at -150 volts, the SCR 47 of the protection circuit 40 is in an "off" state and is non-conducting. The base-emitter junction of the second transistor TR2 is forward-biased, and the base electrode of the second transistor TR2 floats substantially at zero volts. However, since the breakdown voltage of the zener diode D1 has not been exceeded, the base electrode of the first transistor TR1 is held at the voltage of line 11 via the second resistor R1. When an overvoltage occurs on the conductor line 11 which takes the line voltage below -150 volts, the voltage differential between the base electrodes of the transistors TR1 and TR2 (i.e., across the zener diode D1) increases. When that differential increases to the breakdown voltage of the zener diode D1, the zener diode D1 breaks down and begins to conduct.

The resulting fall in voltage on the base electrode of the second transistor TR2 causes it to conduct an increasing current. This in turn results in an increase in current flowing through the first resistor R1, increasing the forward voltage across the base-emitter junction of the first transistor TR1 and causing it to begin conducting current. Once both transistors are conducting, regeneration occurs, and current flow through the transistors increases rapidly. The connection between the anode 44 and the cathode 46 of the protection circuit 40, and hence the connection between ground zero and the conductor line 11, is closed. Current therefore flows from ground zero to the conductor line 11, increasing the voltage of the latter. At the same time, the resulting decrease in the voltage drop across the zener diode D1 turns the latter off. The transistors TR1 and TR2 remain fully conducting until such time as the cause of the overvoltage is removed. At this point, the SCR 47 reverts from its conducting, on-state to its nonconducting, off-state condition.

### **Current triggering**

When not in the ringing mode, the switch 17 switches the -70 volts supply line to

the line driver 36. In this mode, the line drivers maintain a voltage bias on the two line conductors 11, 13. Line current flows through resistors R1 and R2 in parallel. With correctly chosen values for R1 and R2, the voltage developed will be too low to cause current conduction by the first transistor TR1.

However, when an overvoltage occurs on the conductor line 11 which takes the line below -70 volts, substantial line current will flow through the resistors R1, R2. The resulting voltage drop across the resistors causes base current to flow in first transistor TR1. This then causes the second transistor TR2 to conduct current, increasing the base current for second transistor TR2, with the result that both transistors become fully conducting, switching on the SCR 47.

It can be seen that the overvoltage protection circuit of Figure 2a is able to protect the conductor line 11 from overvoltages at both -70 volts and -150 volts in dependence upon the mode in which the SLIC operates.

The purpose of the diode D2 is to clip any overvoltages which may occur on the conductor line 11 in the opposite direction, i.e., positive polarity overvoltages. When a positive overvoltage occurs, the line driver 18 is likely to try to reduce the positive excursion by sinking current. This current flows through the first resistor R1 (and the second resistor R2, if present), reverse biasing the base-emitter junction of the first transistor TR1. This voltage may be sufficient to damage the first transistor TR1, and therefore the diode D2 is provided to clip this reverse bias voltage. The diode D2 may be external to or integral with the protection circuit 40.

The second resistor R2 may be provided to reduce the temperature sensitivity of the trigger current or to increase the trigger current level. The value of this resistor will be in the region of a few ohms and causes considerably less power and voltage loss than the protection resistor in the prior art circuit of Figure 1a.

It will be appreciated that, as mentioned above, the conductor line 13 is protected in the same way by an identical protection circuit 40.

Figure 3 shows a possible silicon structure 300 for the above described protection circuit 40. It comprises an  $N^-$  substrate 301 with metallisations 302, 304 respectively formed on the upper and lower surfaces. The lower metallisation 304 forms the anode 44 and the upper metallisation 302 forms the cathode 46 of the protection circuit 40. The diode D2 is formed by  $N^+$  and P doped regions 306, 308 on each side of the  $N^-$  substrate,

whilst the SCR 47 and the zener diode D1 are formed by  $P^+$ , N, and  $N^+$  regions 310, 312 and 316, the P region 308, and the N- substrate 301. The resistor R1 is formed by a path through the P region 308 from a terminal 318 between the N and  $N^+$  regions to the upper metallisation 302.

Figure 4a shows a second preferred embodiment of the protection circuit 440 according to the invention, in which the protection circuit 440 is gated and uses the supply voltage as the protection reference voltage. In this embodiment, the protection circuit 440 has an additional transistor TR5 whose collector is connected to the anode 44 and whose emitter is connected to the collector of the second transistor TR2 and the base electrode of the first transistor TR1. The base electrode of the additional transistor TR5 is connected directly to the -150 volts supply by a line 402. The additional transistor TR5 is connected as an emitter follower.

If the emitter of the additional transistor TR5 is pulled below the -150v supply level by about 0.7V, the additional transistor TR5 will conduct large amounts of current between the emitter and collector. Since the base of the first transistor TR1 is held close to the -150V supply rail by the emitter of the additional transistor TR5, the first transistor TR1 will start to conduct and will provide base current for transistor TR2. The second transistor TR2 will then start to conduct, switching on the SCR 47. For protection against overvoltages of less than -70 volts, the turn on mechanism is the same as described for Figure 2a. Figure 4b is a diagram of the electrical characteristics of the protector circuit of Figure 4a.

As with Figure 2a, the line 13 is protected by a protection circuit identical to circuit 440.

Figure 5 shows a possible silicon structure 500 for the circuit of Figure 4. The left hand part of the structure is similar to that of Figure 3, with the additional transistor TR5 being formed by two further  $N^+$  regions 504, 506, a P region 508, and the N- substrate 301. The base region 508 is connected to the -150 volt line through a terminal 510.

The above described embodiments are applicable particularly but not exclusively, to SLICS of the type shown in Figure 1a, having two negative voltage supplies, one for normal use and one for the ringing function. However, some SLICs are provided with three voltage supplies, and Figure 6 shows a SLIC 622 with three voltage supplies switched by a switching circuit 602 and protected by a protection circuit 640. In this

embodiment, the SLIC has a -50 volt supply which is switched to the line driver amplifiers 16, 18 during normal use and two 70 volt supplies, one of a negative polarity and the other of a positive polarity, for implementation of the ringing function.

In order to protect the SLIC in both the positive and negative polarities, the protection circuit must provide bi-directional switching. This may be achieved by providing two SCRs in an antiparallel arrangement. In effect, the diode D2 of the embodiment of Figure 2a is replaced by a second SCR 647 in antiparallel with the existing (first) SCR 47, as shown in Figure 6. However, although the base of the second transistor TR2 can be accessed for current triggering, the base of a third transistor TR3 of the SCR 647 cannot.

A further preferred embodiment of the protection circuit 740 for use with SLICs provided with three voltage supplies is shown in Figure 7a. In this embodiment the zener diode D1 of the Figure 2a embodiment is replaced by an SCR circuit which is complementary to the first SCR 47. The result is a protection circuit 740 which comprises a complementary SCR pair arrangement (p-gate and n-gate) 47, 747 which allows both voltage and current triggering under overvoltages of both polarities. This circuit will only trigger the current direction corresponding to the overvoltage polarity.

Figure 7b is a diagram of the electrical characteristics of the protection circuit of Figure 7a.

A suitable silicon structure for the embodiment of Figure 7a is illustrated in Figure 8. The structure on the right hand side of Figure 8 is similar to the structure of Figure 3 but with the P<sup>+</sup> region 310 forming an isolation region for the first SCR 47. The complimentary SCR 747 is formed by the P<sup>+</sup>, N, P-, N- and N<sup>+</sup> regions 702, 704, 706, 708 and 710.

Figure 9a shows an embodiment of the protection circuit 940 that is for use with SLICs provided with three voltage supplies, which is a modification of the embodiment of Figure 4a. Here, the diode D2 is replaced by a complementary gated SCR circuit 747.

The latter also uses the supply voltage as the protection reference voltage. In this embodiment the protection circuit 940 has an additional transistor TR6 whose collector is connected to the anode 44 and whose emitter is connected to the collector of a third transistor TR3 and the base electrode of a fourth transistor TR4. The base electrode of the additional transistor TR6 is connected directly to the +70 volts supply by a line 704,

whilst the base of the transistor TR5 is connected to the -70 volts line by the line 202. The circuit of Figure 9a is in effect a combination of the circuits of Figures 4a and 7a.

Figure 9b is a diagram of the electrical characteristics of the protection circuit of Figure 9a, and Figure 10 is a possible silicon structure for the protection circuit of Figure 9a.

Although a number of specific embodiments have been described herein, it will be appreciated that variations and modifications will suggest themselves to those skilled in the pertinent arts. For example, although SCR's have been disclosed as the switching elements in these circuits, other types of switching elements may be found that are suitable, or even preferable, for various applications. Moreover, although the above-described embodiments are best implemented as single integrated circuits, they may also be realized, in whole or in part, with discrete components.

**WHAT IS CLAIMED IS:**

1. An overvoltage protection circuit for a conductor, the circuit comprising:  
a switching element for connecting said conductor to a reference potential; and  
a trigger operable to switch said switching element from a first, OFF state to a second, ON state;  
wherein said trigger is voltage-triggered by voltages of a first magnitude on said conductor and current-triggered by voltages of a second magnitude on said conductor, thereby to provide overvoltage protection at two discrete voltage magnitudes.
2. An overvoltage protection circuit for a conductor, the circuit comprising:  
first and second switching elements, each having a first electrode, a second electrode and a base electrode;  
a diode; and  
a resistance;  
wherein the first electrode of the first switching element is connected to said conductor and to a first electrode of said resistance; the second electrode of said first switching element is connected to the base electrode of the second switching element and a first electrode of the diode; the base electrode of the first switching element is connected to a second electrode of the diode, a second electrode of the resistance and to the second electrode of the second switching element; and the first electrode of the second switching element is connected to a reference potential; and the base electrode of the first switching element is connected to the conductor; and  
wherein the circuit is voltage-triggered by voltages of a first magnitude on said conductor and current-triggered by voltages of a second magnitude on said conductor thereby to provide overvoltage protection at two discrete magnitudes.
3. A method of protecting a conductor from overvoltages at two different magnitudes, the method comprising:  
providing a switching element between said conductor and a reference potential, said switching element being switchable between a first, conducting state and a second, non-conducting state;

monitoring the voltage on said conductor and switching said switching element into said conducting state in response to said voltage exceeding a first threshold voltage thereby to connect said conductor to said reference potential to reduce said voltage to below said first threshold voltage level;

monitoring the current flowing through said conductor and switching said switching element into said conducting state in response to said current exceeding a level representing a second threshold voltage thereby to connect said conductor to said reference potential to reduce the voltage on said conductor to below said second threshold voltage.

4. A method as claimed in claim 3 wherein said second threshold voltage level is lower than said first threshold voltage level.





3

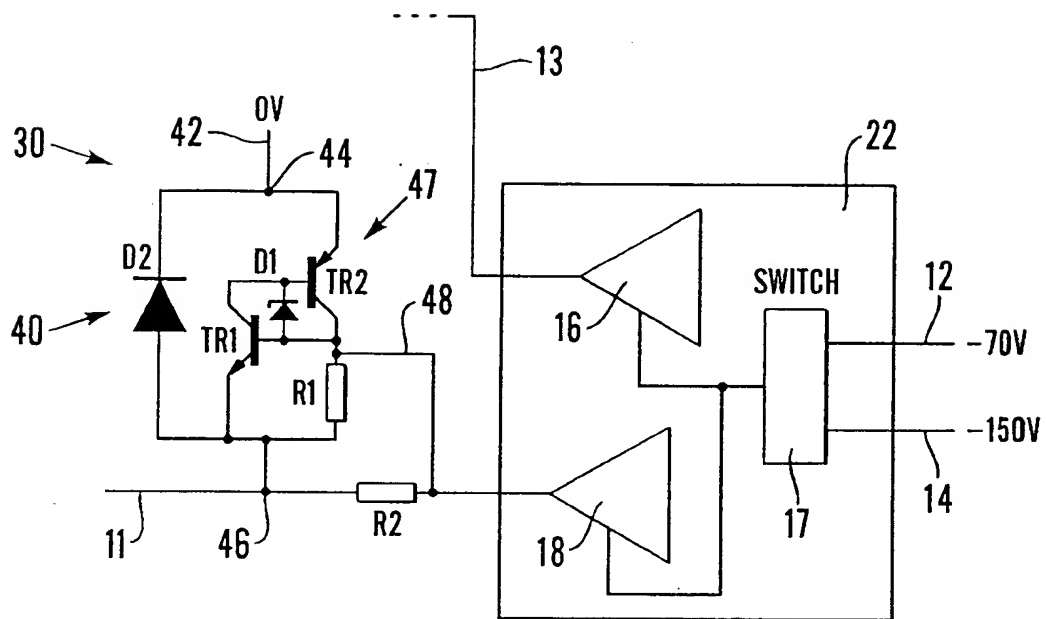


Fig. 2a

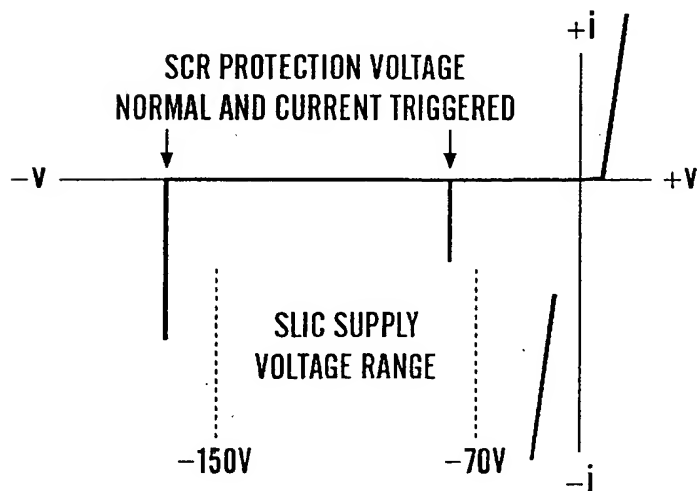


Fig. 2b

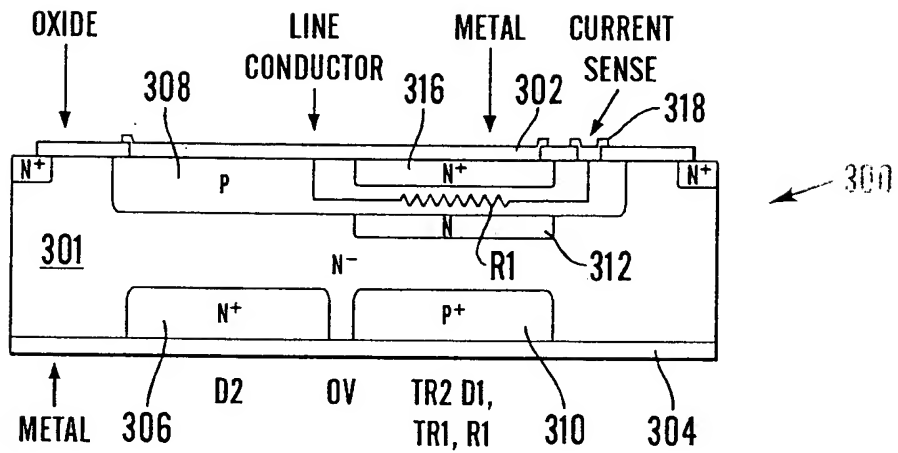


Fig.3

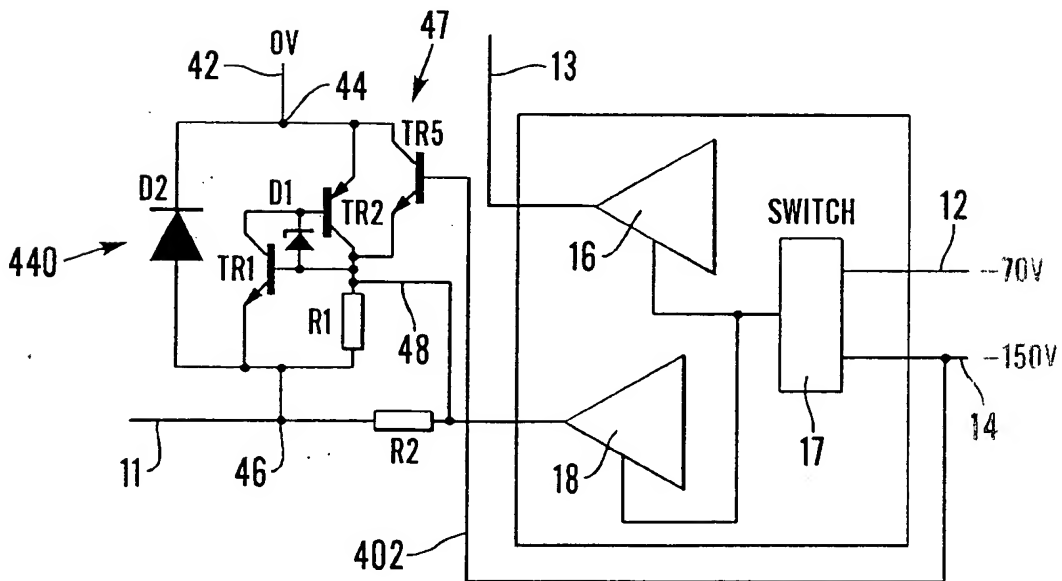


Fig.4a

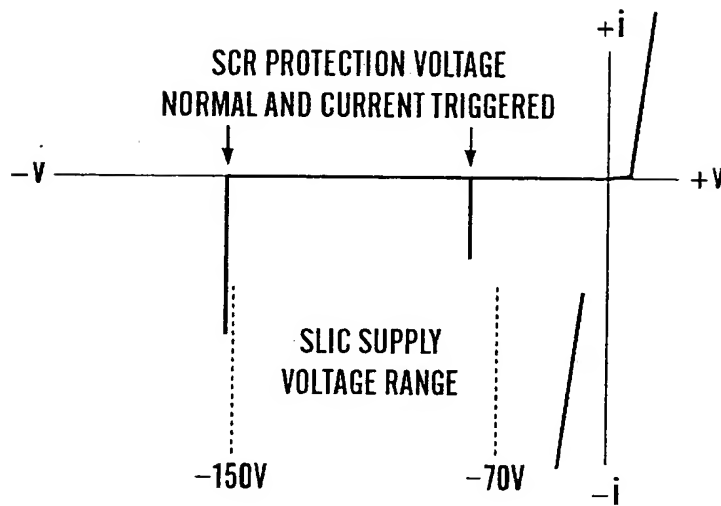


Fig.4b

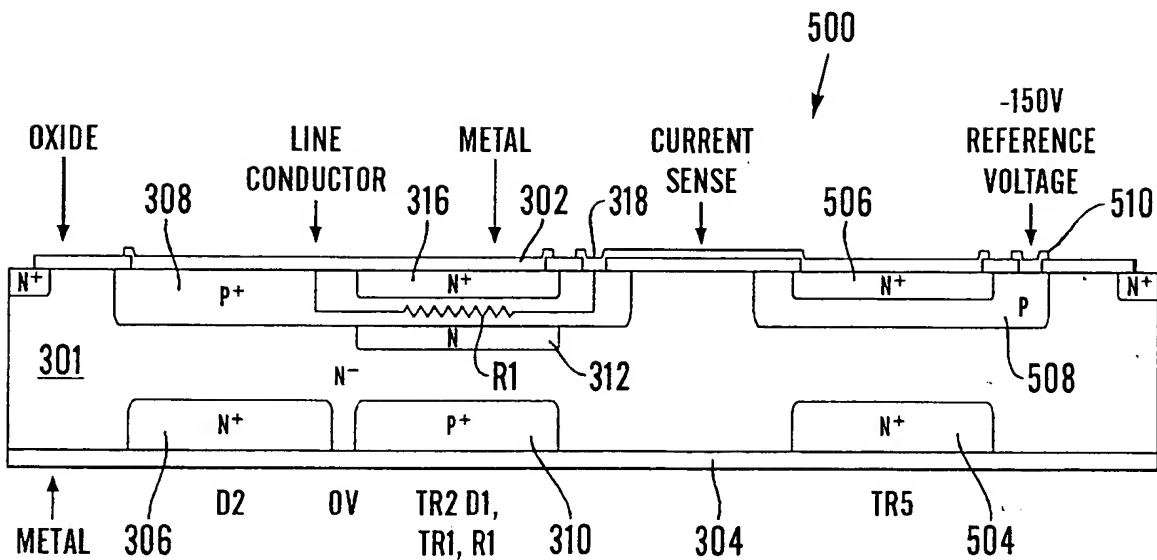


Fig.5

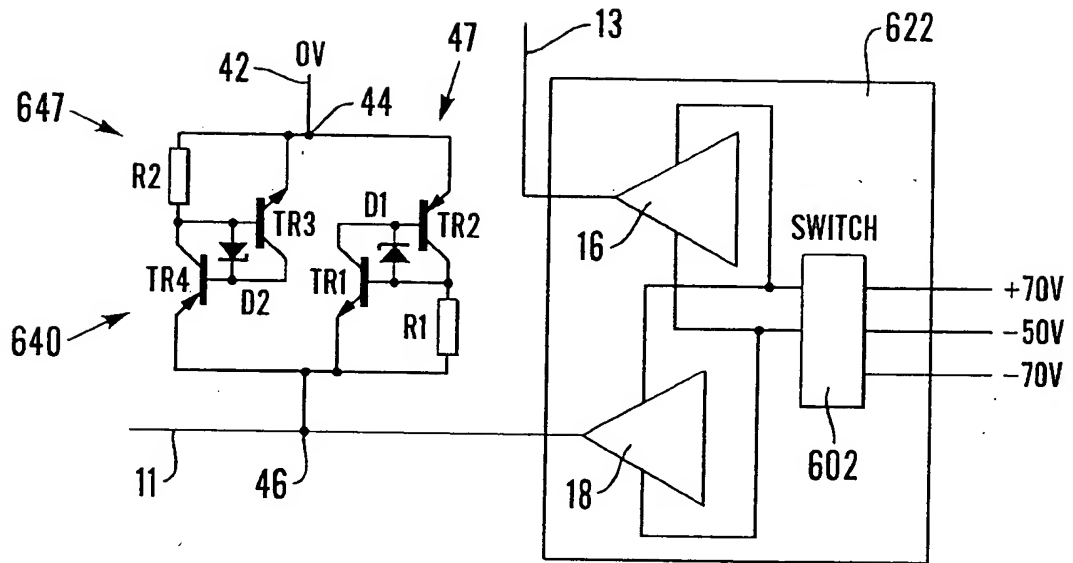


Fig. 6

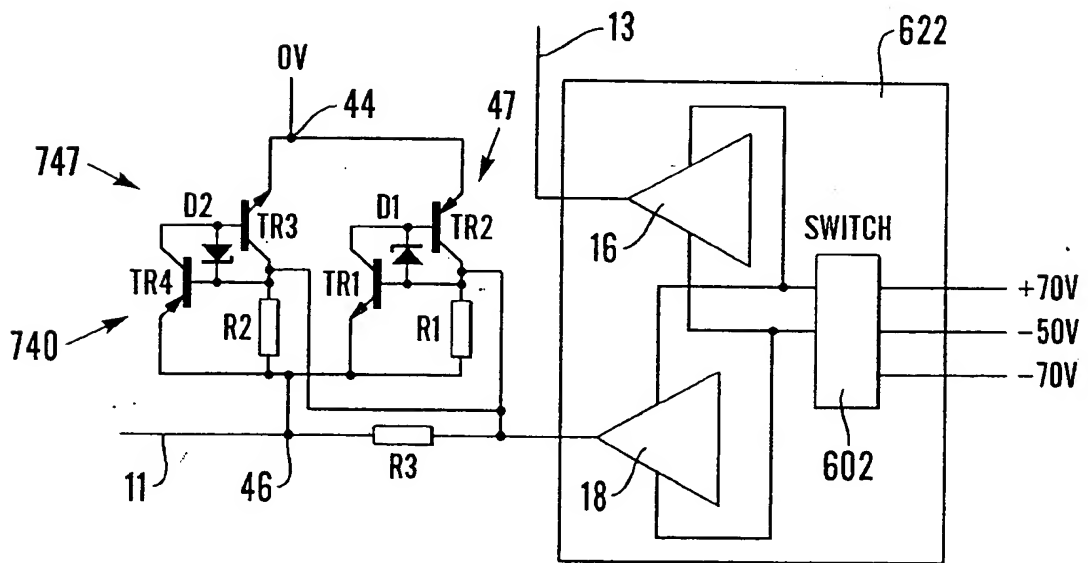


Fig. 7a

6/8

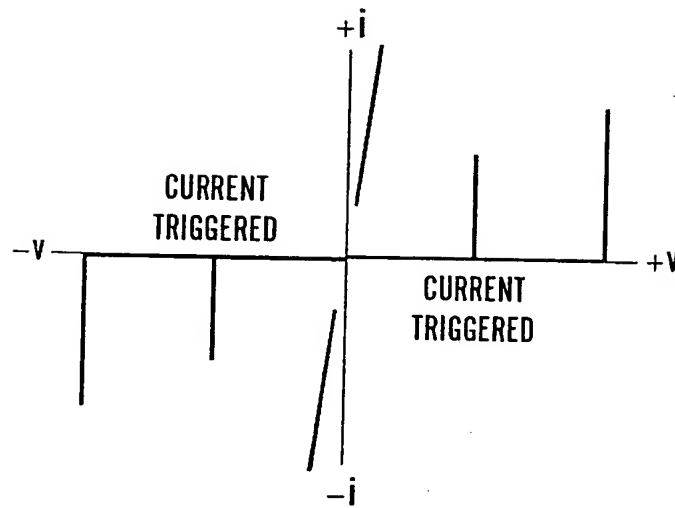


Fig.7b

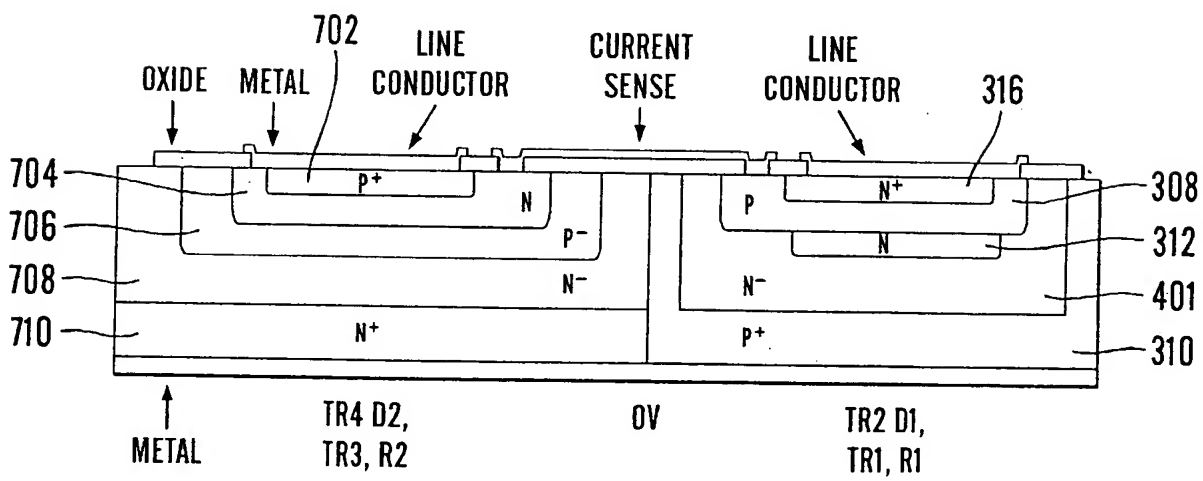


Fig.8

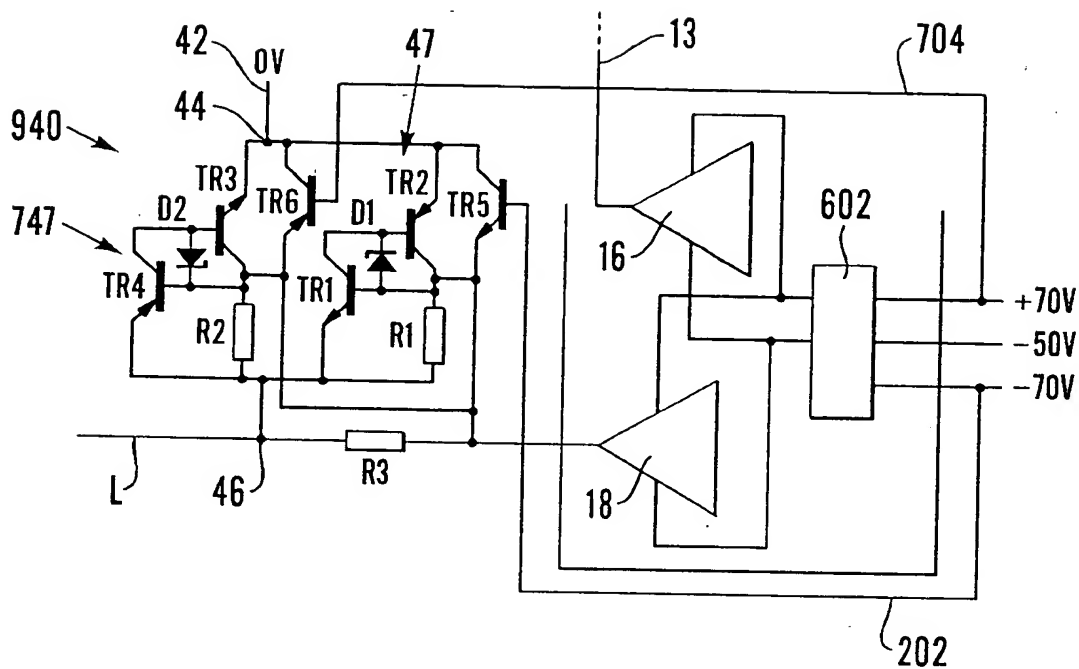


Fig. 9a

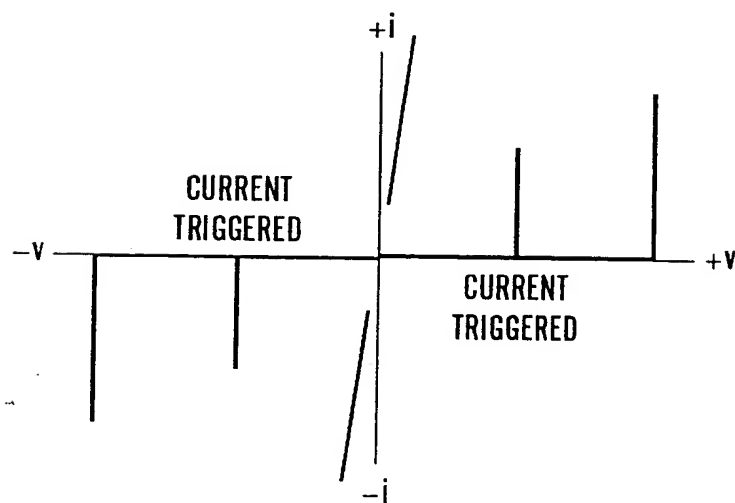


Fig. 9b

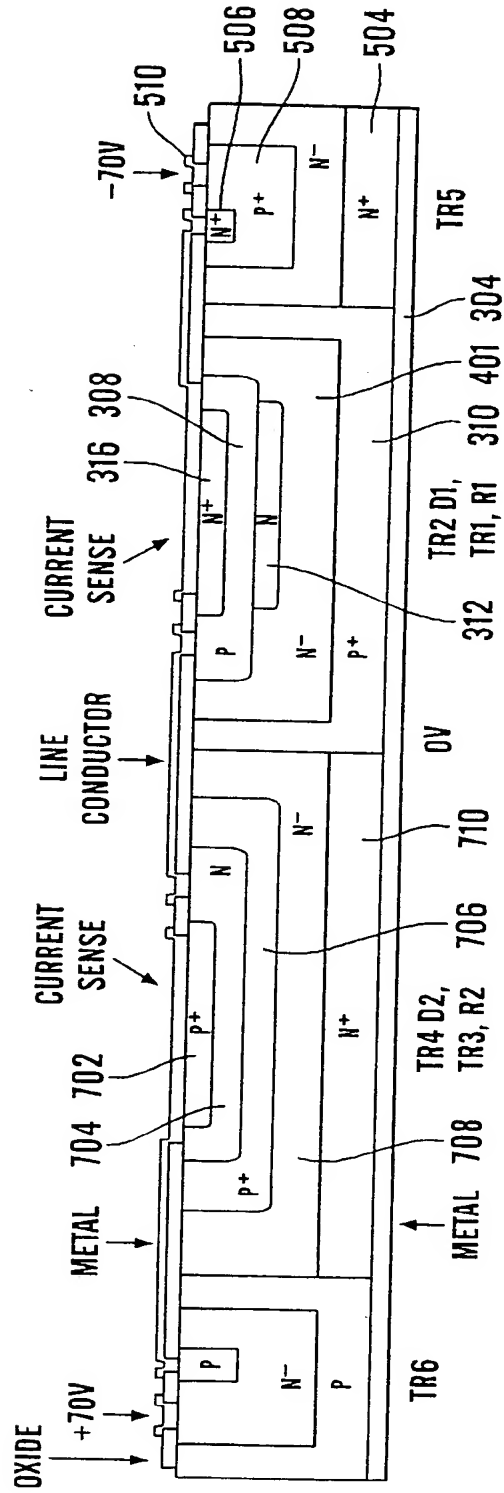


Fig. 10